

ELEVATION

The Elevation highbay offers a cost effective, quality low-profile design and is the perfect choice for any warehouse, fitness centre or application with high ceilings. With high lumen efficiency the Elevation highbay provides a high quality light output. The Elevation offers quality performance and value for money.

PRODUCT FEATURES


- Light output, up to 24,000Lm
- Efficacy (up to 150Lm/W) delivering superior energy efficiency
- Ideal for all commercial applications
- Colour rendering exceeds CRI:70
- Beam Angle: 90°
- CCT options: 5000K
- Stainless steel 304 mounting ring
- Available colour: black
- Dimming options on request
- Five Year Warranty



Model	Source	Lumen Output	System Power	CCT	Beam Angle
HB-ELE-120	NICHIA	18000Lm	120W	5000K	90°
HB-ELE-160	NICHIA	24000Lm	160W	5000K	90°
CRI	Driver	Material	Voltage	Colour	Dimming
>70	MEAN WELL	Aluminium	110-240 VAC	BLACK	Available on request

Alternative colour temperatures available on request.

Photometrics (standard beam angles,
alternative available on request)

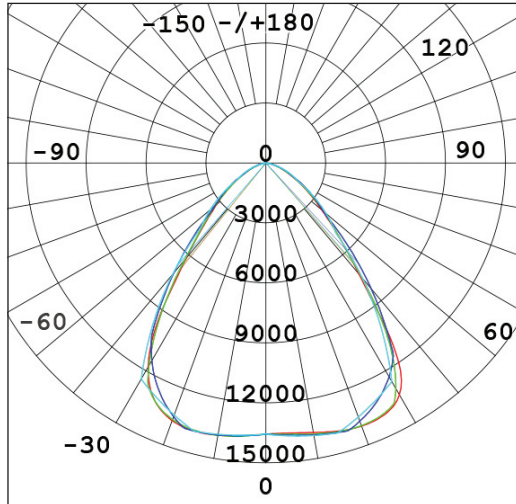

ELEVATION

Physical

Height:	186.2mm
Diameter:	Ø300mm
Weight:	2.8/3.7kg

Control and Programming

Dimming:	Available on request
----------	----------------------

Construction

Fixture:	Aluminium
Fixture colour:	BLACK
Lens:	Polycarbonate
Impact rating:	IK08
Protection rating:	IP65

Connection

Power connection:	AU/EU/US Standard Plug
-------------------	------------------------

Output

Luminous Flux:	18000/24000Lm
Efficacy:	150Lm/W
Beam Angle:	90°
CCT:	5000K
CRI:	>70

Electrical

Input Voltage:	100-240 VAC, 50/60HZ
Power:	120/160W
Power Factor:	>0.92

Thermal

Cooling:	Integrated aluminium heatsink
Operating Range Tc:	-30° to 50°C