ZAIA DS-B9559

The Zaia wall mounted series is available in round, square or direct mounting, down and up and down light. Diecast aluminium housing with high corrosion resistance making it a great option for coastal areas. Also complementary to modern contemporary designs for residential or commercial applications.

The Zaia range of lighting is IP65 rated meaning they are protected against low pressure jets of water from all practical directions and offer fire-resistant silicon seal gaskets. With a 4mm thick tempered glass and DuPont outdoor electrostatic powder coating we recommend Zaia as an ideal luminaire for an external application.



PRODUCT FEATURES

- Light output, up to 1,100Lm
- Efficacy (up to 73Lm/W) delivering superior energy efficiency
- Ideal for commercial exterior application
- Projected lamp life of 50,000 hours
- Colour rendering exceeds CRI:80
- Beam Angle: 24°/60°
- CCT option 3000K
- Protection rating IP65
- Wall mounted
- Available colours silver and black
- Dimming options on request
- Direct connection
- Five Year Warranty

IP 65 | CRI >80 | FIVE YEARS 5 WARRANTY

Dimensions 100x200mm, Ø90

Model	Source	Delivered Lumens	System Power	CCT	Beam Angle
LPA-WM-B9559-153K	CREE	1100Lm	15W	3000K	24°/60°
CRI	**Driver**	**Material**	**Voltage**	**Colour**	**Dimming Options**
>80	MEAN WELL	Aluminium	110v-277v	BK / SIL	Available on request

Alternative colour temperatures available on request.

The information presented in this document is for information purposes only and does not constitute any obligation on our part. We reserved the right to make technical and design changes at any time and without notice.

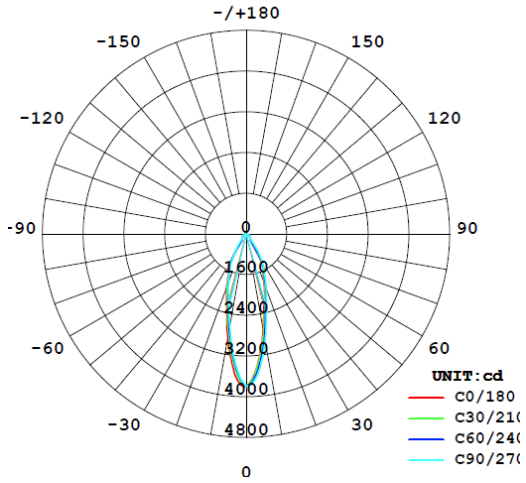

Enquire for availability of optional beam angles.

ZAIA DS-B9559

Physical	
Height:	200mm
Diameter:	90mm
Weight:	0.62kg
Control and Programming	
Dimming:	Available on request
Construction	
Fixture:	Aluminium
Fixture colour:	BK / SIL
Lens:	
Impact rating:	IK08
Protection rating:	IP65
Connection	
Power connection:	Direct
Output	
Luminous Flux:	1100Lm
Efficacy:	73Lm/W
Beam Angle:	24°/60°
CCT:	3000K
CRI:	>80
Quantity of Light source:	1
Lifetime:	50,000 hours (L70)
Electrical	
Input Voltage:	110v-277v
LED Power:	13W
Driver Losses:	2W
Total Power:	15W
Power Factor:	>0.6
Total Harmonic Distortion:	≤10%
Thermal	
Cooling:	
Operating Range Tc:	-20...+50°C
Humidity (non-condensing):	20-90%RH
Run Temperature Teq:	
Certificates	
EMC:	CISPR 15:2011 EN55015:2013 EN61547:2009 EN61000-3-2:2014 EN61000-3-3:2013
Electrical Safety:	AS/NZS 60598.1:2013 AS/NZS 60598.2.1:2014 EN60598-2-2:2012 EN60598-1:2015

The information presented in this document is for information purposes only and does not constitute any obligation on our part. We reserved the right to make technical and design changes at any time and without notice.