




Firefly | 2 W | 360° | Pendants

Cod: FI30SOSXHB7ZL



## Technical Specifications


Source lamp	LED 2 W
Total wattage	2
Voltage	24 Vdc
Control	Power supply not included • dimmable on request
Luminous flux (*Source flux)	119 lm (160 lm*) @ 3000 K
Luminous efficacy	59.5 lm/W @ 3000 K
McADAM steps	3
Beam	360°
CRI	>90
Life time	L 70 > 50.000 h Ta 25°C L 70 > 50.000 h Ta 40°C
Energy efficiency class	A++
IP rating	65
IK rating	8
Insulation class	III




## Materials

Body	Extruded aluminium EN AW6026
Diffuser	Opal PMMA
Finishing	Graphite - Polyester powder paint

## Isolux

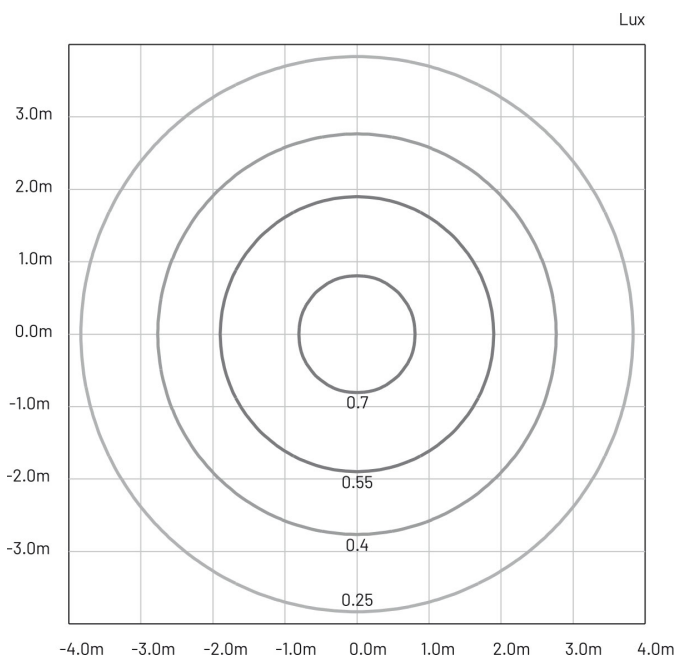

## Photometry

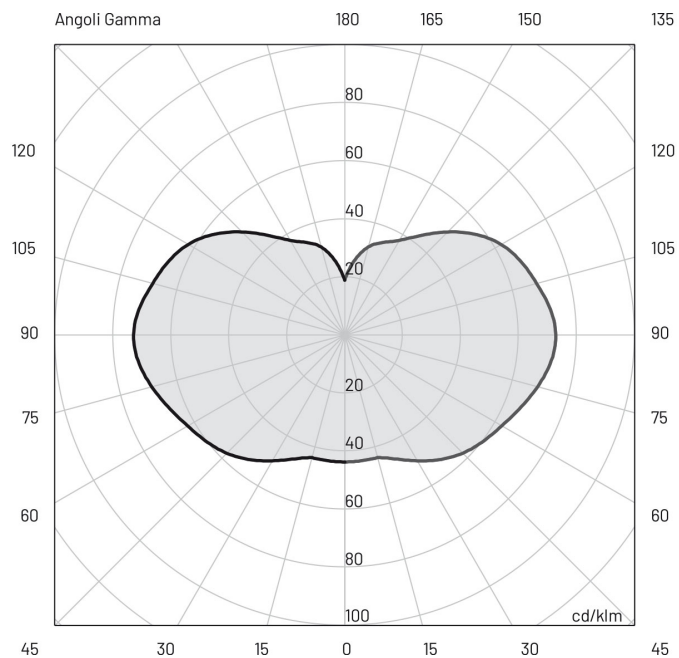

## Included accessories

- 2 m length cable H07RN-F
- Cable clamp strip

## Available accessories

<b>0404M011</b>	Single connection IP68
<b>0409BT016</b>	Transformer _ 24 Vdc - 100 W Connect up to 30 device
<b>0409BT014</b>	Transformer _ 24 Vdc - 12 W Connect up to 4 device
<b>0409BT015</b>	Transformer _ 24 Vdc - 25 W Connect up to 8 device

For office locations visit [www.lpalighting.com](http://www.lpalighting.com)