

ISABEL SR-EC15

Isabel is a compact luminaire for lower level and more precise accenting. Available as a fix or adjustable version, it is perfect for highlighting key elements of your design.

Energy efficiency is a key component of our product focus and Isabel will ensure significant energy savings over traditional solutions. Of course, CCT colours and a glass diffuser are optional.

Phase dimmable with 0-10V and DALI available upon request.



Model	Source Power (W)	System Power (W)	Source Lumen (Lm) (CRI>80, 3000K)	System Lumen (Lm) / Beam Angle (CRI>80, 3000K)		
				Narrow (22°/21°)	Medium (30°)	Medium (38°)
SR-EC15-A	6	7	796	521	541	556
SR-EC15-B	12	15	1580	1048	1068	1092

CRI	CCT	Material	LED Lifetime	Colour	Voltage	Dimming
>80/>90	3000K/4000K	Aluminium	L80B50 (14K) 56,000 hrs	BK / WH	220-240V	Available on request

Accessories

(available on request)




Glass Lens


Photometrics

(standard beam angles, alternative available on request)

Narrow (21°) at 15W

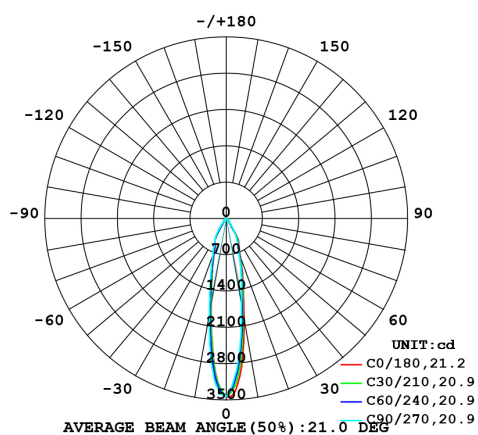

Medium (30°) at 15W

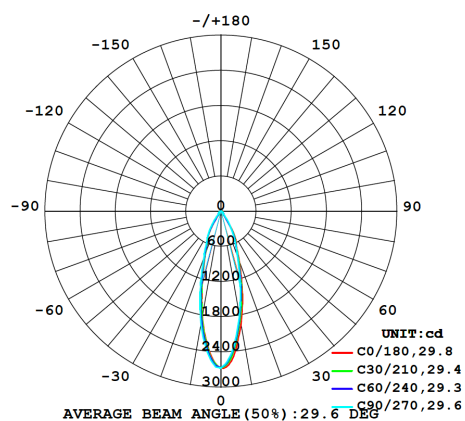

Medium (38°) at 15W

