


GINO DR-GS03


A compact commercial downlight perfect for hospitality and retail our Gino series ticks all the boxes with its reduce size and higher illumination. With a minimal design, the Gino is supported by superior performance. Minimum glare and market leading colour rendering making it a great choice for all applications.



15W/20W Dimensions

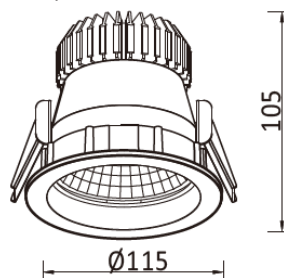

30W/37W Dimensions

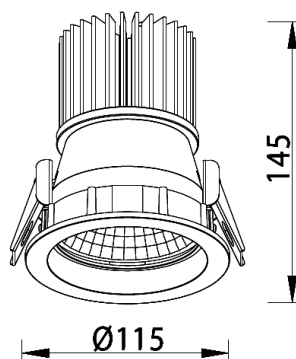

Model	Source Power (W)	System Power (W)	Source Lumen (Lm) (CRI>80, 3000K)	System Lumen (Lm) / Beam Angle (CRI>80, 3000K)	
				Narrow (20°/22°/23°/23°)	Medium (38°/39°/41°/41°)
DR-GS03-B	12	15	1598	1273	1229
DR-GS03-J	17	20	2284	1742	1676
DR-GS03-K	25	30	3257	2615	2496
DR-GS03-L	32	37	3850	3084	2989

CRI	CCT	Material	LED Lifetime	Colour	Voltage	Dimming
>80/>90	3000K/4000K	Aluminium	50,000 hrs (L70)	BK / WH	220-240V	Available on request

Accessories

(available on request)



Glass Lens

Photometrics

(standard beam angles, alternative available on request)

