




## ZALE VANDALPROOF BATTEN

The Zale batten range has been designed for specifically vandal resistant applications where a higher level of impact protection is required. Providing high lumen output with high efficacy, the Zane provides reliability and excellent working performance. The aluminium die-cast lamp body is ideal for many indoor and outdoor surfaces and with an IK10 rating this vandal-proof batten is perfect for applications such as industrial corridors, schools, security lighting, garages, correctional facilities.

### PRODUCT FEATURES

- Light output: Up to 6,554Lm
- Efficacy: Up to 131Lm/W
- Ideal for all interior and exterior applications
- Life time 50,000 hours
- Colour rendering exceeds CRI>80
- Beam Angle 120°
- CCT options 3000K/4000K/5000K
- Protection rating IP66
- IK10 impact resistance
- Optional security screws provided
- 600mm and 1200mm configurations
- Available colour: grey
- Five Year Warranty

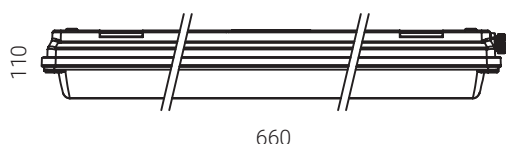

660



1170




Model	Lumen Output	System Power	CCT	Beam Angle
BTWP-ZAL60-25	2925Lm	25W	4000K	120°
BTWP-ZAL60-35	4210Lm	35W	4000K	120°
BTWP-ZAL120-35	4210Lm	35W	4000K	120°
BTWP-ZAL120-50	6554Lm	50W	4000K	120°

CRI	Material	Voltage	Colour	Dimming
>80	Aluminium	220-240V AC, 50/60Hz	Grey	Available on request



## Photometrics

(standard beam angles, alternative available on request)

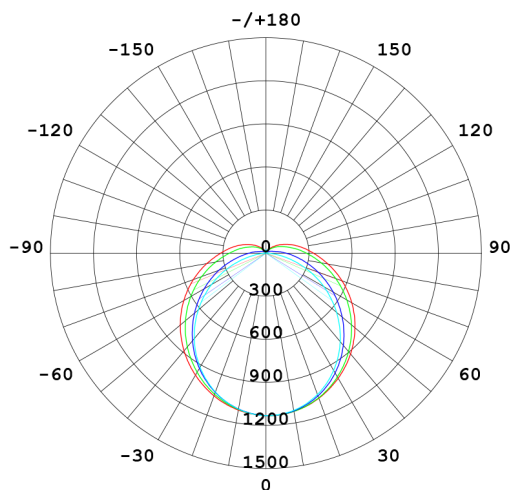

# ZALE VANDALPROOF BATTEN

## Physical

Height:	110mm
Width:	95mm
Length:	660/1170mm
Weight:	1.95/3.1kg

## Construction

Fixture:	Aluminium
Fixture colour:	Grey
Impact rating:	IK10
Protection rating:	IP66

## Connection

Power connection:	Hard wired
-------------------	------------

## Output

Luminous Flux:	2925Lm/4210Lm/6554Lm
Efficacy:	131Lm/W
Beam Angle:	120°
CCT:	3000K/4000K/5000K
CRI:	>80
LED Lifetime:	50,000 hours

## Electrical

Input Voltage:	220-240 V AC, 50/60HZ
Power:	25W/35W/50W
Power Factor:	>0.9

## Thermal

Operating Range Tc:	-35° to 55°C
---------------------	--------------