VISI DR-A233

Visi is an everyday downlight made for professional applications. Once recessed into the ceiling the Visi blends in effortlessly with its narrow trim and provides an anti-glare comfort light. However, trim size is no reflection on performance and Visi provides a full range of illumination level in both fixed and adjustable design.

Visi DR-A233 can be installed using a 90mm hole saw cut out.

Energy efficiency is key and Visi series are at the top of the performance scale, ensuring significant energy savings over alternative solutions. CCT colours, high performance miro reflectors, and dimming options available on request.

Available as a recessed spot or downlight.

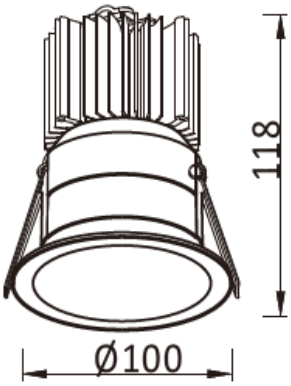

IP 20 | CRI >80 | CRI >90 | UGR ⩽15 | FIVE YEAR 5 WARRANTY

Ø90

Model	Source Power (W)	System Power (W)	Source Lumen (Lm) (CRI>80, 3000K)	System Lumen (Lm) / Beam Angle (CRI>80, 3000K)		
				Medium (29°)	Medium (31°)	Medium (43°)
DR-A233-A	6	7	783	519	-	585
DR-A233-B	12	16	1503	-	930	1033

CRI	CCT	Material	LED Lifetime	Colour	Voltage	Dimming
>80/>90	3000K/4000K	Aluminium	50,000 hrs (L70)	BK / WH	220-240V	Available on request

The information presented in this document is for information purposes only and does not constitute any obligation on our part. We reserved the right to make technical and design changes at any time and without notice.

Accessories

(available on request)

Glass Lens

Photometrics

(standard beam angles, alternative available on request)

Medium (31°) at 16W

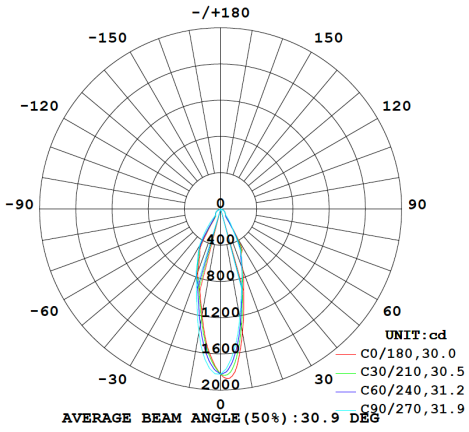

Medium (43°) at 16W

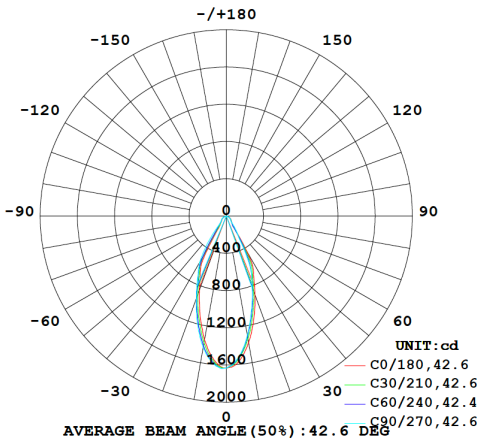

The information presented in this document is for information purposes only and does not constitute any obligation on our part. We reserved the right to make technical and design changes at any time and without notice.