




IVES WA-A007

The Ives wall mounted series is configured as an uplight only wall light or an up/down version if required. The Ives series is complementary to modern contemporary design for residential or commercial applications. The Ives range of lighting is IP20 rated has an integral driver, 4mm thick tempered glass diffuser and dimming capabilities.

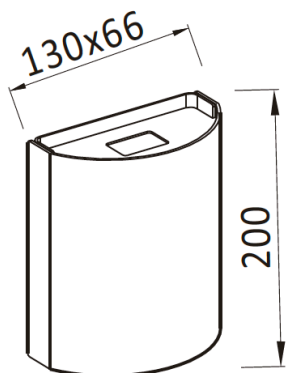

Model	Source Power (W)	System Power (W)	Source Lumen (Lm) (CRI>80, 3000K)	System Lumen (Lm) / Beam Angle (CRI>80, 3000K)	CCT
WA-A007	2 x 6	2 x 7	2 x 523Lm	2 x 307Lm	3000K/4000K
CRI	Material	LED Lifetime	Colour	Voltage	Dimming
>80/>90	Aluminium/Steel	50,000 hrs (L70)	BK / WH	230V 50Hz	Available on request



Photometrics

(standard beam angles, alternative available on request)

