



LPA-TR-CL12030C-50 (IP44)

The Cleanroom fitting has been designed to meet the requirements of healthcare and cleanroom applications. It offers easy, quick cleaning, long lifetime and high colour rendering perfect for medical and hygiene environments.



A simple and modern fitting achieving optimal performance and energy efficiency. With a variety of illumination levels and power outputs, our range of luminaires deliver flexibility ensuring the best lighting outcome for every client.

Available in IP44 or IP65, the Cleanroom can be t-bar, plaster recessed or surface mounted. This luminaire is available in a cyanosis version compliant with COI standards.

Applications: hospitals, clinics, laboratories, medical centres and food preparation areas.

PRODUCT FEATURES

- Light output: Up to 4,800Lm
- Efficacy: Up to 95Lm/W
- Life time: L70 (10K) >60,000 hrs
- Colour rendering exceeds CRI:>90
- CCT options: 4000K (3000K available on request)
- Installation: T-bar, Plaster Recessed or Surface Mounted with Frame
- Diffuser: Opal
- Dimming: Dali on request
- Connection: Flex & plug
- Warranty: Five Year

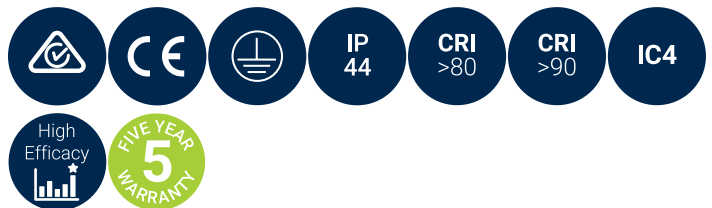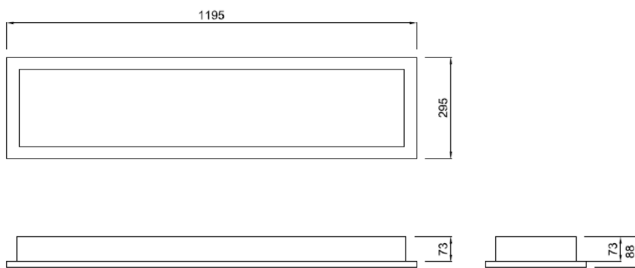

| Model | Delivered Lumens | System Power | CCT | Beam Angle |
|--------------------------|------------------|--------------|-------|------------|
| TR-CL12030C-50-3K (IP44) | 4800Lm | 50W | 3000K | 115° |
| TR-CL12030C-50-4K (IP44) | 4800Lm | 50W | 4000K | 115° |

| CRI | Material | Voltage | Colour | Dimming Options |
|------------------------------------|-----------|------------|--------|----------------------|
| 3000K @ CRI >80 4000K @ CRI >90 | Aluminium | 220-240VAC | White | Available on request |



Accessories

(available on request)



LPA-AC-SF-CL-IP44-WH
Surface Mounted Deep Frame
1220x320x100

Photometrics

(standard beam angles, alternative available on request)

