
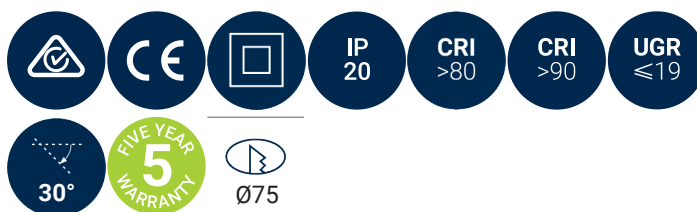


SMITH SR-A803

Smith is a low glare compact luminaire for lower level and more precise accenting. Available as an adjustable downlight with a selection of narrower beam settings they are perfect for highlighting key elements of your design.

Energy efficiency is a key component of our product focus and Smith will ensure significant energy savings over traditional solutions. Of course, CCT colours and a glass diffuser are optional. Phase dimmable with 0-10V and DALI available upon request.

Available in fixed and adjustable with warm dimming and shape adjusting optical accessories.

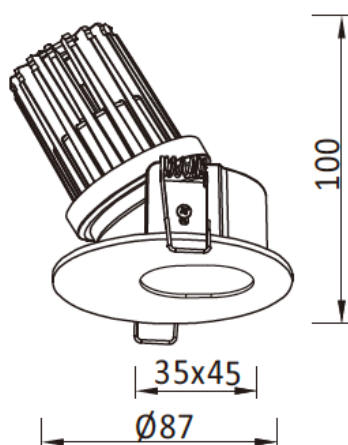

| Model | Source Power (W) | System Power (W) | Source Lumen (Lm) (CRI>80, 3000K) | System Lumen (Lm) / Beam Angle (CRI>80, 3000K) | | | |
|-----------|------------------|------------------|--------------------------------------|---|---------------------|---------------------|-----------------|
| | | | | Narrow (16°) | Narrow (23°/22°) | Medium (32°/31°) | Medium (39°) |
| SR-A803-A | 7 | 9 | 745 | 366 | 567 | 591 | 445 |
| SR-A803-B | 12 | 14 | 1520 | 667 | 1019 | 1059 | 786 |

| CRI | CCT | Material | LED Lifetime | Colour | Voltage | Dimming |
|---------|-------------|-----------|------------------|---------|----------|----------------------|
| >80/>90 | 3000K/4000K | Aluminium | 50,000 hrs (L70) | BK / WH | 220-240V | Available on request |

Accessories

(available on request)



Anti-glare

Photometrics

(standard beam angles, alternative available on request)

