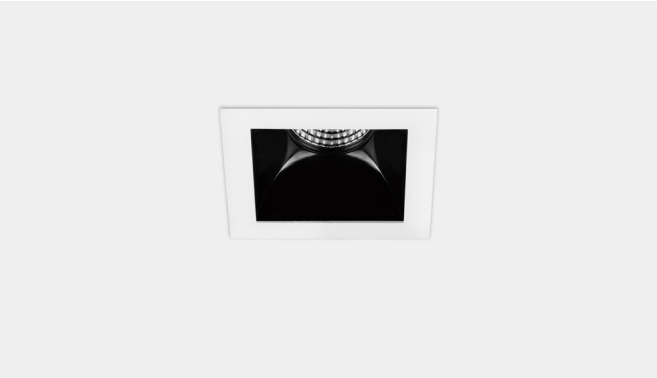



LEVI DR-A097 (Higher Efficacy)

With a UGR <12, this mini system is a recessed luminaire that can double as a spot or wall washer. Perfect for foyers, office spaces, shopping centres, art galleries and many other applications the Levi range offers luminaries that blend into the architecture due to their streamline and compact housing.

Multi lumen packages due to the multiple connections of the single body (up to 8 modules can be connected) enables the lighting to meet requirements for various uses and conditions. With low UGR the Levi is optimised for uniformity and visual comfort.

Available in recessed downlight, surface downlight or wall washer.

IP 20 | CRI >80 | CRI >90 | UGR ⩽12 | FIVE YEAR 5 WARRANTY

(1) 38x38
(2) 69x38
(3) 99x38
(4) 130x38
(5) 141x38
(6) 191x38
(7) 221x38
(8) 252x38

Model	Source Power (W)	System Power (W)	Source Lumen (Lm) (CRI>80, 3000K)	System Lumen (Lm) / Beam Angle (CRI>80, 3000K)	Dimensions (AxB)
				Medium (29°)	
DR-A097	2.1	3	236	202	44x44
DR-A097-2	2.1x2	6	236x2	202x2	74x44
DR-A097-3	2.1x3	9	236x3	202x3	105x44
DR-A097-4	2.1x4	12	236x4	202x4	135x44
DR-A097-5	2.1x5	15	236x5	202x5	146x44
DR-A097-6	2.1x6	18	236x6	202x6	196x44
DR-A097-7	2.1x7	21	236x7	202x7	227x44
DR-A097-8	2.1x8	24	236x8	202x8	257x44

CRI	CCT	Material	LED Lifetime	Colour	Voltage	Dimming
>80/>90	3000K/4000K	Aluminium	L90 >24,500 (6K hrs)	BK / WH	220-240V	Available on request

The information presented in this document is for information purposes only and does not constitute any obligation on our part. We reserved the right to make technical and design changes at any time and without notice.

Photometrics

(standard beam angles, alternative available on request)

Medium (29°) at 3W

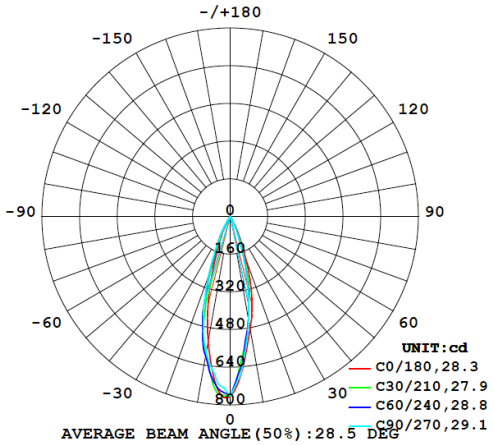

The information presented in this document is for information purposes only and does not constitute any obligation on our part. We reserved the right to make technical and design changes at any time and without notice.