





Fog\_1 130 | 2.5 W | diffuse | Ceiling lamps Cod: FGL1POSDHB10G

Also available for wall, ceiling/wall recessed and projector



## Technical Specifications

Source lamp	LED 2.5 W
Total wattage	4
Voltage	220-240 Vac - 50/60 Hz
Control	On/Off • dimmable on request
Luminous flux (*Source flux)	115 lm (285 lm*) @ 3000 K
Luminous efficacy	29 lm/W @ 3000 K
McADAM steps	3
Beam	diffuse
CRI	>90
Life time	L 70 > 50.000 h Ta 25°C L 70 > 50.000 h Ta 40°C
IP rating	67
IK rating	10
Insulation class	I



## Materials


Body	Extruded aluminium EN AW6060
Diffuser	Opal glass
Finishing	Black - Polyester powder paint



E (lux)

H(m)	lux (3000 K)	Ø (m)
1.00	35	3.49
2.00	9	6.98
3.00	4	10.48
4.00	2	13.97
5.00	1	17.46

Photometry

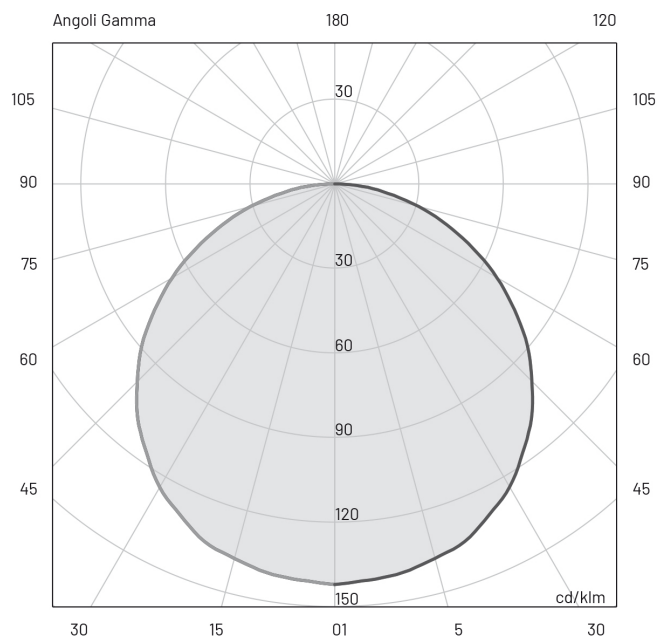

Included accessories

- 0.5 m length cable -05RN-F
- Single connection IP68