

LPA-TR-CL6030-23-COI (IP65)

The LPA Cleanroom fitting has been designed to meet the requirements of healthcare and cleanroom application. It offers easy, quick cleaning, long lifetime and high colour rendering; as well as offering a COI rating of <2.0 making it the perfect luminaire for medical facilities.



A simple and modern fitting achieving optimal performance and energy efficiency. With a variety of illumination levels and power outputs, our range of luminaires deliver flexibility ensuring the best lighting outcome for every client.

Available in IP44 or IP65, the Cleanroom is compliant with COI standards and perfect for hygiene environments. Available in plaster recessed installation.




Applications: hospitals, clinics, laboratories, medical centres and food preparation areas.

PRODUCT FEATURES

- Light output: Up to 1,900Lm
- Efficacy: Up to 86Lm/W
- Life time: L70 (10K) >60,000 hrs
- Colour rendering exceeds CRI:>90
- Cyanosis Observation Index: <2.0 (4000K)
- CCT options: 4000K (3000K available on request)
- Installation: Plaster Recessed
- Diffuser: Opal
- Dimming: Dali on request
- Connection: Flex & plug
- Warranty: Five Year

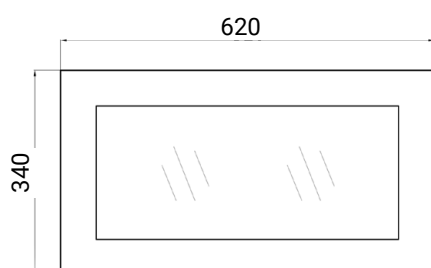

575x315



Magnetic part

Silicon rubber 9x5

Ceiling Sealed Foam 10x12

Model	Delivered Lumens	System Power	CCT	Beam Angle
TR-CL6030-23-3K-COI (IP65)	1900Lm	23W	3000K	115°
TR-CL6030-23-4K-COI (IP65)	1900Lm	23W	4000K	115°

CRI	Material	Voltage	Colour	Dimming Options
3000K @ CRI >80 4000K @ CRI >90	Aluminium	220-240VAC	White	Available on request