


HALO DOWNLIGHT (8")

The Halo is an excellent choice as a low glare entry level downlight for commercial and retail applications with a shallow depth to suit low ceiling spaces. Its adjustable CCT switch provides a variation of colour temperatures to accommodate your lighting requirements.

Applications: offices, supermarkets, hotels, restaurants, retail stores, wet areas and more.

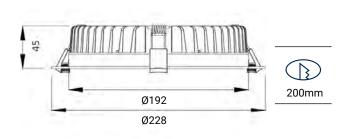

PRODUCT FEATURES

- Light output: Up to 3,284Lm
- Efficacy: Up to 109Lm/W
- LED Lifetime (L70B50): >60,000 hours
- Colour rendering exceeds CRI>80
- Beam Angle: 90°
- · Ultra Low Glare Diffuser
- · Protection rating IP44
- · CCT adjustable switch
- CCT options: 3000K/4000K/5700K
- Available colour: white
- · Dimming: Dali on request
- Five Year Warranty















Delivered Lumens	System Power	CCT Switchable	Beam Angle
2718Lm	25W	3000K-4000K-5700K	90°
3284Lm	35W	3000K-4000K-5700K	90°
Material	Voltage	Colour	Dimming Options
Aluminium	220-240V, 50Hz	White	Available on request
	2718Lm 3284Lm Material	2718Lm 25W 3284Lm 35W Material Voltage	2718Lm 25W 3000K-4000K-5700K 3284Lm 35W 3000K-4000K-5700K Material Voltage Colour



Photometrics

(standard beam angles, alternative available on request)

2000 30 C60/240,82.0deg AVERAGE BEAM ANGLE (50%):81.9 DEG 270,81.8deg

Very Wide (90°) at 35W

-/+180

-150

150

1000

-60

1500

000

1000

-30

2000

2000

30

200210,78.4deg

230/210,78.4deg

230/210,78.3deg

AVERAGE BEAM ANGLE (50%):78.4 DEG

