


EDEN DR-A089

The Eden recessed downlight is small in size with a low output suitable for smaller areas. Its shallow recess makes this luminaire perfect for joineries, cabinets, discrete subtle architectural lighting and residential applications.

Energy efficiency is a key component of our product focus and the Eden series will ensure significant energy savings over traditional solutions. Of course, CCT colours and a glass diffuser are optional. Phase dimmable with 0-10V and DALI available upon request.




Model	Source Power (W)	System Power (W)	Source Lumen (Lm) (CRI>90, 3000K)	System Lumen (Lm) / Beam Angle (CRI>90, 3000K)	
				Narrow (17°)	Medium (33°)
DR-A089-A	7	8	872	717	743

CRI	CCT	Material	LED Lifetime	Colour	Voltage	Dimming
>90	3000K/4000K	Aluminium	L80(12K) > 66,000 hrs L90 (12K) > 41,500 hrs	BK / WH	220-240V	Available on request

Photometrics

(standard beam angles, alternative available on request)

Narrow (17°) at 8W

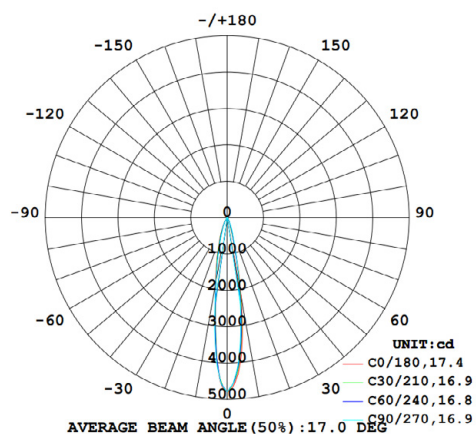

Medium (33°) at 8W

