




ELVIS SR-A195 (Trimless)

Effortlessly accentuate specific areas or features with the Elvis downlight. Its adjustable design can accommodate the most varied applications and boasts an anti-glare device as well as an efficient heatsink ensuring the lifetime of the source. The Elvis series offers fixed, adjustable, IP, trimmed and trimless designs making this series a versatile solution for your lighting needs. This series is designed and manufactured to deliver optimum performance in any environment.

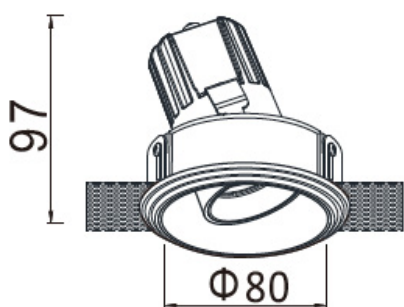


Model	Source Power (W)	System Power (W)	Source Lumen (Lm) (CRI>90, 3000K)	System Lumen (Lm) / Beam Angle (CRI>90, 3000K)	
				Narrow (22°)	Medium (36°)
SR-A195-A	6	7	837	650	663
SR-A195-B	12	14	1536	1228	1247

CRI	CCT	Material	LED Lifetime	Colour	Voltage	Dimming
>90	3000K/4000K	Aluminium	L80(12K) > 66,000 hrs L90 (12K) > 41,500 hrs	BK / WH	220-240V	Available on request

Accessories

(available on request)



Honeycomb Louvre



Elliptical Lens



Glass Lens

Photometrics

(standard beam angles, alternative available on request)

