




## NANI SR-A341

The Nani series is a fully adjustable downlight. With up to 70° tilt and 355° rotation, this downlight proves an excellent option for narrow to medium beam spreads and wall washing in retail and commercial spaces.

Energy efficiency is a key component of our product focus and options for CCT colours.

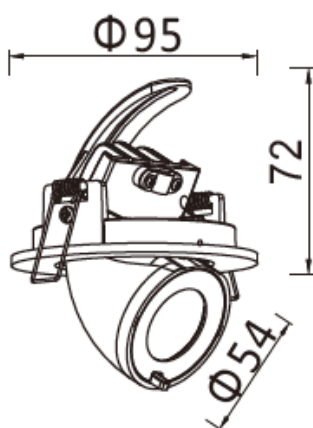

Model	Source Power (W)	System Power (W)	Source Lumen (Lm) (CRI>90, 3000K)	System Lumen (Lm) / Beam Angle (CRI>90, 3000K)		
				Narrow (20°/23°)	Medium (27°)	Medium (30°/37°)
SR-A341-A	7	8	872	618	-	598
SR-A341-B	12	14	1586	1154	1151	1128


  

CRI	CCT	Material	LED Lifetime	Colour	Voltage	Dimming
>90	3000K/4000K	Aluminium	L80(12K) > 66,000 hrs L90 (12K) > 41,500 hrs	BK / WH	220-240V	Available on request


## Photometrics

(standard beam angles, alternative available on request)


Narrow (20°) at 8W

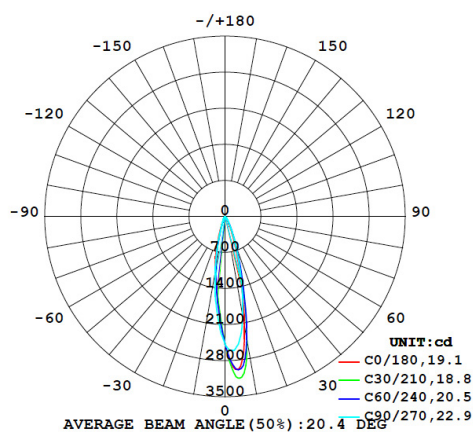


Medium (30°) at 8W

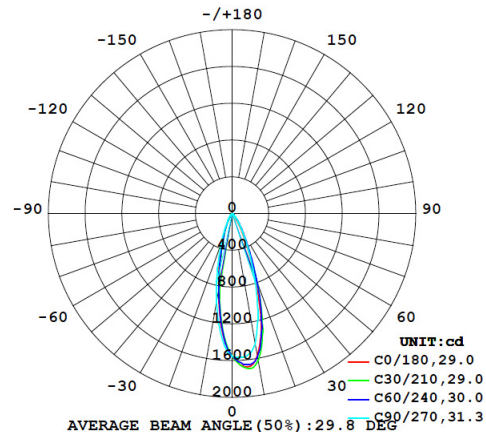

Narrow (23°) at 14W

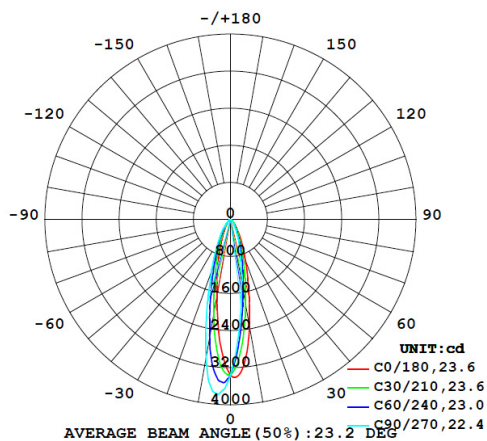

Medium (27°) at 14W

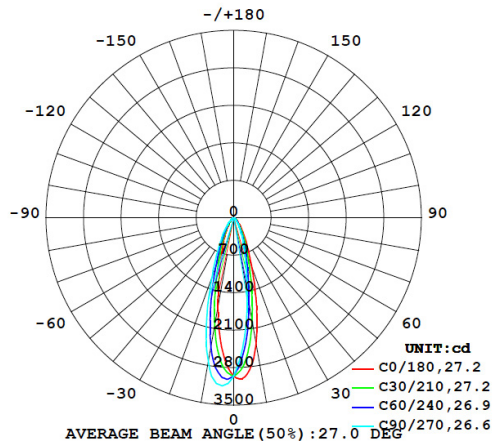

Medium (37°) at 14W

