
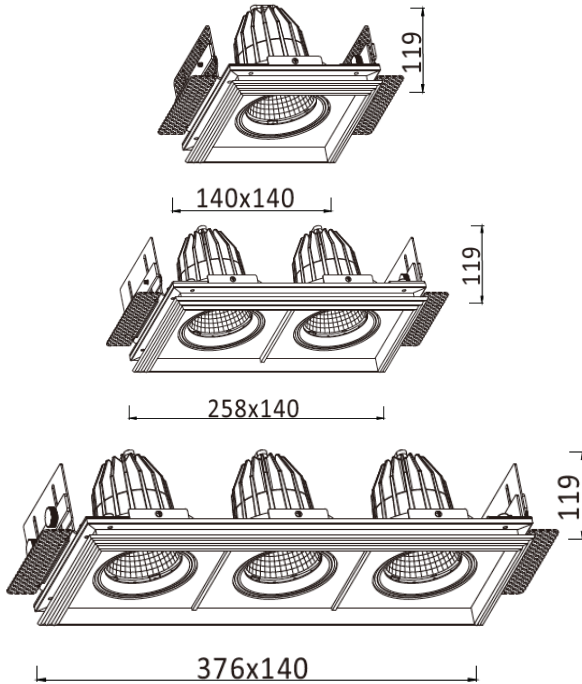


PARKER SR-C109

The Parker family of products provide a range of square and rectangular options to suit many different installations. With a flexible design solution across various output levels and the versatility of 1 to 3 adjustable light heads per fixture. The Parker provides your design with the optimum required lumen output paired with a superior level of versatility and adjustment, showcasing architectural features, products and objects in their best light. The Parker is easily adjustable with 30° tilt and 355° horizontal plane. Available in trimless and recessed downlight.

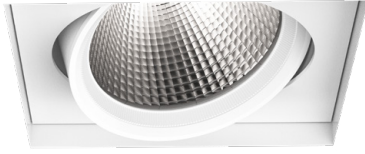

- (1) 142x142
- (2) 260x142
- (3) 378x142

Model	Source Power (W)	System Power (W)	Source Lumen (Lm) (CRI>90, 3000K)	System Lumen (Lm) / Beam Angle (CRI>90, 3000K)			
				Narrow (15°)	Narrow (22°)	Medium (37°)	Wide (60°)
SR-C109-J	17	19	2269	2090	2085	2056	1990
SR-C109-K	25	27	3108	2857	2814	2829	2712


CRI	CCT	Material	LED Lifetime	Colour	Voltage	Dimming
>90	3000K/4000K	Aluminium	L80(12K) > 66,000 hrs L90 (12K) > 41,500 hrs	BK / WH	220-240V	Available on request

Model	Source Lumen (Lm) / Beam Angle (CRI>90, 3000K)
SR-C109-2-J	2x2269
SR-C109-2-K	2x3108

Model	Source Lumen (Lm) / Beam Angle (CRI>90, 3000K)
SR-C109-3-J	3x2269
SR-C109-3-K	3x3108

Accessories

(available on request)



Honeycomb Louvre



Elliptical Lens



Cross Accessory




Glass Lens


Photometrics

(standard beam angles, alternative available on request)


Narrow (15°) at 19W

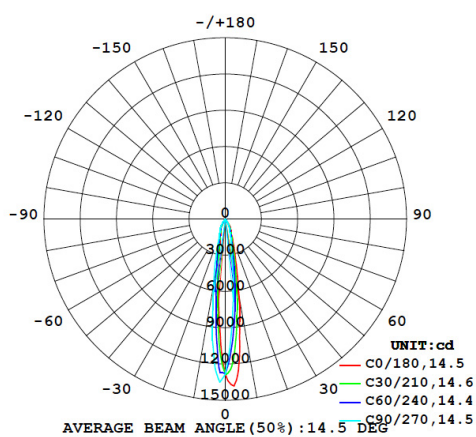

Narrow (21°) at 19W

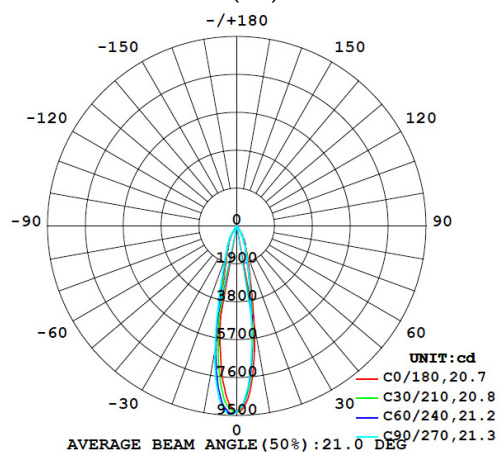

Medium (37°) at 19W

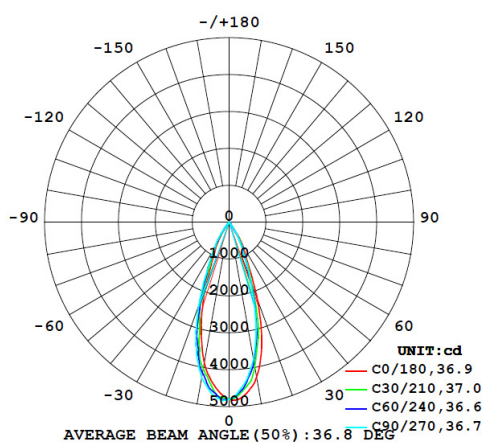

Wide (60°) at 19W

