




## JUNE II ST-A846

The June II series offers an adjustable lens adapting the beam angle from narrow to wide with one simple twist of the lens. The June II has been redesigned to achieve a more compact design, a smoother transition when adjusting the distance between the lens and the source, and a new lens ensuring uniformity and no excess secondary spotting. Offering such flexibility, this spotlight series with in-track driver is suitable for all applications.

All our fixtures fit standard three circuit track and adjust easily through 90° in the vertical plane and 355° in the horizontal plane. Options include the choice of CCT colour, body colour and lens.

The June II is available in track, recessed spot and pendant configuration.

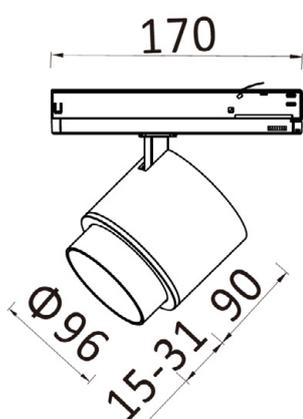

Model	Source Power (W)	System Power (W)	Source Lumen (Lm) (CRI>90, 3000K)	System Lumen (Lm) / Beam Angle (CRI>90, 3000K)	
				Narrow~Wide (17°~64°)	
ST-A846-J	17	19	2269	1583~ 2015	
ST-A846-K	25	27	3107	2144~ 2725	


  

CRI	CCT	Material	LED Lifetime	Colour	Voltage	Dimming
>90	3000K/4000K	Aluminium	L80(12K) > 66,000 hrs L90 (12K) > 41,500 hrs	BK / WH	220-240V	Available on request



## Accessories

(available on request)



Honeycomb Louvre

## Photometrics

(standard beam angles, alternative available on request)

