




## GALLERY ST-C441

The streamlined and compact design of the Gallery series allows for a built-in driver. This compact luminaire is powerful enough for any commercial or retail application offering a versatile range of output levels and beam angle options, and our market-leading colour rendering. This spotlight series offers a compact design with the highest performance standards.

All our fixtures fit standard three-circuit track and adjust easily through 90° in the vertical plane and 355° in the horizontal plane. Options include the choice of CCT colour, body colour, honeycomb louvres, glass lens, elliptical lens and barn door cut-off control.

The Gallery series is available as a track spot or pendant configuration.

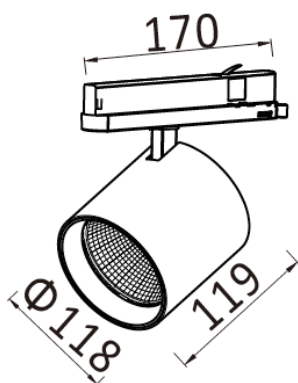


Model	Source Power (W)	System Power (W)	Source Lumen (Lm) (CRI>90, 3000K)	System Lumen (Lm) / Beam Angle (CRI>90, 3000K)			
				Narrow (12°/10°/10°/12°)	Narrow (20°/20°/20°/21°)	Medium (43°)	Wide (58°)
ST-C441-J	17	19	2269	2176	2120	2099	2108
ST-C441-K	25	27	3107	3030	2936	2896	2928
ST-C441-L	32	35	3985	3781	3676	3620	3689
ST-C441-M	36	39	4454	4338	4245	4177	4220


CRI	CCT	Material	LED Lifetime	Colour	Voltage	Dimming
>90	3000K/4000K	Aluminium	L80(12K) > 66,000 hrs L90 (12K) > 41,500 hrs	BK / WH	220-240V	Available on request

## Accessories

(available on request)



Honeycomb Louvre



Barn Door



Elliptical Lens




Glass Lens


## Photometrics

(standard beam angles, alternative available on request)


Narrow (12°) at 39W

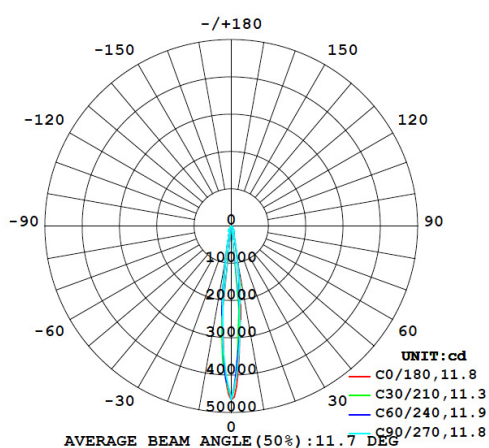

Medium (21°) at 39W

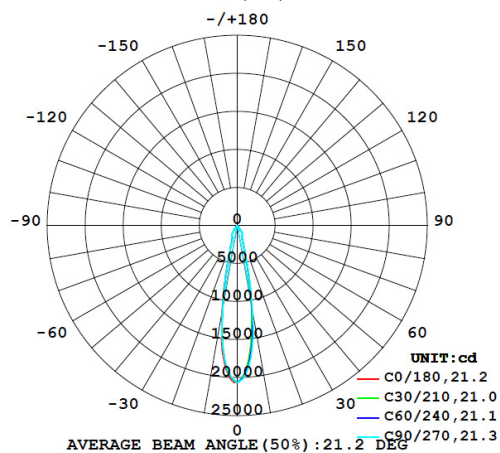

Medium (43°) at 39W

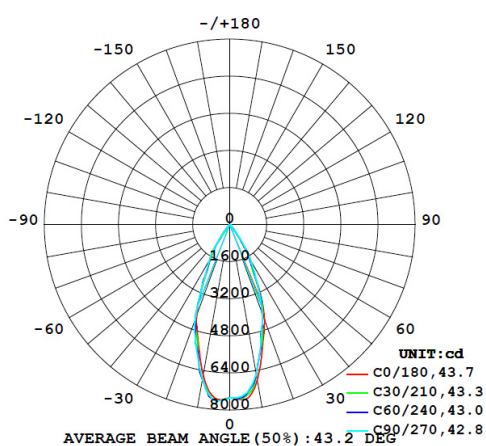

Wide (58°) at 39W

