

LEVI DR-A098 (Trimless)

With a UGR <12, this mini system is a recessed luminaire that can double as a spot or wall washer. Perfect for foyers, office spaces, shopping centres, art galleries and many other applications the Levi range offers luminaires that blend into the architecture due to their streamline and compact housing.

Multi lumen packages due to the multiple connections of the single body (up to 8 modules can be connected) enables the lighting to meet requirements for various uses and conditions. With low UGR the Levi is optimised for uniformity and visual comfort.

Available in recessed downlight, surface downlight or wall washer.



- (1) 72x36
- (2) 72x36
- (3) 97x36
- (4) 127x36
- (5) 138x36
- (6) 188x36
- (7) 219x36
- (8) 249x36

Model	Source Power (W)	System Power (W)	Source Lumen (Lm) (CRI>90, 3000K)	System Lumen (Lm) / Beam Angle (CRI>90, 3000K)			Dimensions (AxB)
				Narrow (20°/19°/21°/21°/ 20°/21°/20°/20°)	Medium (39°/37°/36°/35°/ 34°/35°/35°/34°)	Medium (44°/43°/43°/43°/ 48°/48°/48°/47°)	
DR-A098	2	3	207	169	172	181	34x34
DR-A098-2	5	6	426	361	319	362	64x34
DR-A098-3	8	9	639	530	455	539	95x34
DR-A098-4	9	11	823	693	626	703	125x34
DR-A098-5	11	13	1035	809	758	862	136x34
DR-A098-6	14	16	1250	1007	894	1014	186x34
DR-A098-7	15	18	1401	1142	1180	1189	217x34
DR-A098-8	17	20	1599	1304	1326	1358	247x34


CRI	CCT	Material	LED Lifetime	Colour	Voltage	Dimming
>90	3000K/4000K	Aluminium	L70 (10K) > 60,000 hrs L90 (10K) > 49,000 hrs	BK / WH	220-240V	Available on request




Photometrics

(standard beam angles, alternative available on request)

Narrow (20°) at 20W

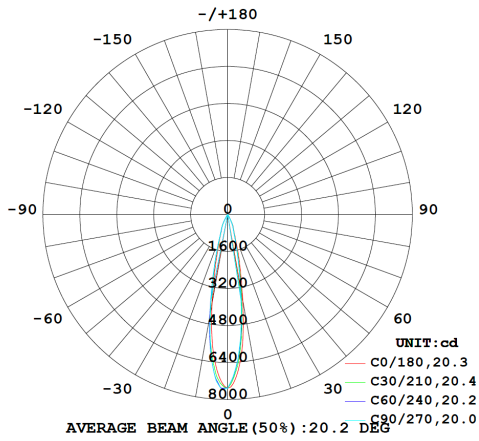

Medium (34°) at 20W

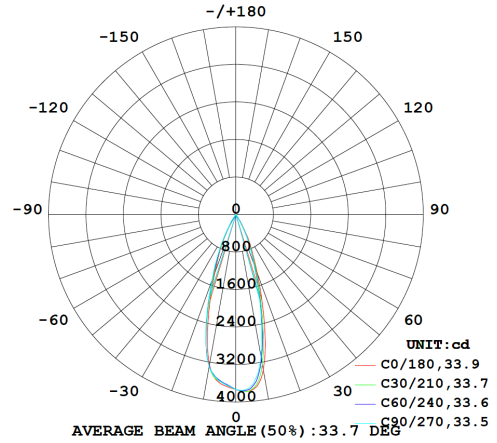

Wide (47°) at 20W

