




## MAYA SERIES (Surface)

Maya is a high-performing luminaire suitable for a variety of applications. Choose from seven size options, the Maya delivers high efficiency using LED chips and an acrylic diffuser. An optional micro prismatic diffuser can be used to ensure a UGR<19 rating. Available in surface-mounted and pendant formats with the option of dali, 1-10V and Casambi dimming.

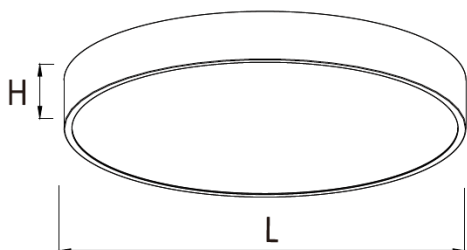

Model	Source Power (W)	System Power (W)	Source Lumen (Lm) (CRI>90, 3000K)	System Lumen (Lm) / Beam Angle (CRI>90, 3000K)		Dimensions (LxH)
				Wide (107°/107°/108°/108°/108°/110°/110°)		
DS-A213	17	20	2865	2183		Ø300x78mm
DS-A214	24	26	4087	2875		Ø400x78mm
DS-A215	30	34	5267	3795		Ø500x78mm
DS-A216	40	46	7334	5373		Ø600x78mm
DS-A217	45	51	8588	6510		Ø800x78mm
DS-A218	58	65	10665	9842		Ø1000x78mm
DS-A218	68	76	12383	11433		Ø1000x78mm

CRI	CCT	Material	LED Lifetime	Colour	Voltage	Dimming
>90	3000K/4000K	Aluminium	L70 (10K) > 60,000 hrs	BK / WH	220-240V	Available on request



## Photometrics

(standard beam angles, alternative available on request)

