

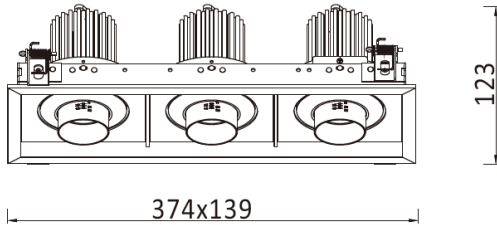
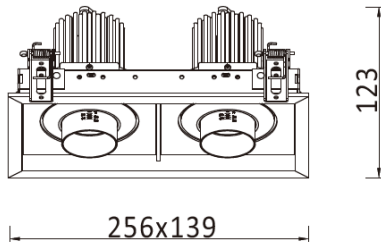




JUNE II SR-A535

The June II series offers an adjustable lens adapting the beam angle from narrow to wide with one simple twist of the lens. The June II has been redesigned to achieve a more compact design, a smoother transition when adjusting the distance between the lens and the source, and a new lens ensuring uniformity and no excess secondary spotting. Offering such flexibility, this spotlight series with remote driver is suitable for all applications.

The June II is available in track, recessed spot and pendant configuration.

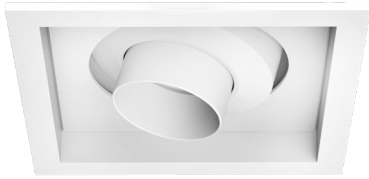

- (1) 128x128
- (2) 245x128
- (3) 362x128

Model	Source Power (W)	System Power (W)	Source Lumen (Lm) (CRI>90, 3000K)	System Lumen (Lm) / Beam Angle (CRI>90, 3000K)	
				Narrow~Wide (13°~50°)	
SR-A535-A	5	7	605	467~524	
SR-A535-A	9	11	896	681~714	

CRI	CCT	Material	LED Lifetime	Colour	Voltage	Dimming
>90	3000K/4000K	Aluminium	L80(12K) > 66,000 hrs L90 (12K) > 41,500 hrs	BK / WH	220-240V	Available on request


Model	Source Lumen (Lm) / Beam Angle (CRI>90, 3000K)
SR-A535-2-A	2x605
SR-A535-2-A	2x896

Model	Source Lumen (Lm) / Beam Angle (CRI>90, 3000K)
SR-A535-3-A	3x605
SR-A535-3-A	3x896



Accessories

(available on request)



Honeycomb Louvre

Photometrics

(standard beam angles, alternative available on request)

