







JUNE II SR-A536

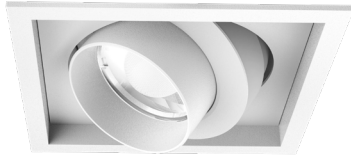

The June II series offers an adjustable lens adapting the beam angle from narrow to wide with one simple twist of the lens. The June II has been redesigned to achieve a more compact design, a smoother transition when adjusting the distance between the lens and the source, and a new lens ensuring uniformity and no excess secondary spotting. Offering such flexibility, this spotlight series with remote driver is suitable for all applications.

The June II is available in track, recessed spot and pendant configuration.

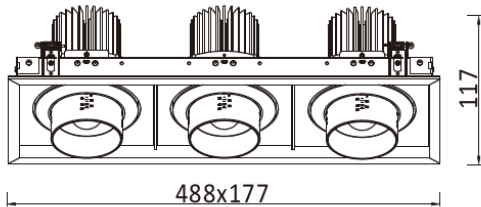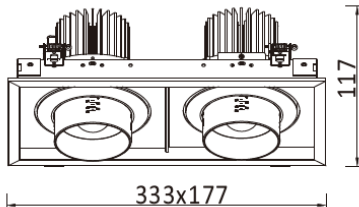

- (1) 165x165
- (2) 320x165
- (3) 475x165

Model	Source Power (W)	System Power (W)	Source Lumen (Lm) (CRI>90, 3000K)	System Lumen (Lm) / Beam Angle (CRI>90, 3000K)	
				Narrow~Wide (17°~64°)	
SR-A536-A	17	19	2269	1583~2015	
SR-A536-A	25	27	3107	2144~2725	

CRI	CCT	Material	LED Lifetime	Colour	Voltage	Dimming
>90	3000K/4000K	Aluminium	L80(12K) > 66,000 hrs L90 (12K) > 41,500 hrs	BK / WH	220-240V	Available on request

Model	Source Lumen (Lm) / Beam Angle (CRI>90, 3000K)
SR-A536-2-A	2x2269
SR-A536-2-A	2x3107

Model	Source Lumen (Lm) / Beam Angle (CRI>90, 3000K)
SR-A536-3-A	3x2269
SR-A536-3-A	3x3107



For office locations visit www.lpalighting.com

The information presented in this document is for information purposes only and does not constitute any obligation on our part. We reserved the right to make technical and design changes at any time and without notice.



Accessories

(available on request)



Honeycomb Louvre

Photometrics

(standard beam angles, alternative available on request)

