




SUMMER SR-A618 (High Efficacy)

The Summer is an adjustable downlight series with the ability to shift modes as a recessed luminaire to a spotlight. Its high efficiency lens provides a uniformed light distribution. With a rotation up to 355° and vertical axis tilt of up to 30°, the Summer series delivers flexibility to suit a variety of applications.

Available in a trim version.

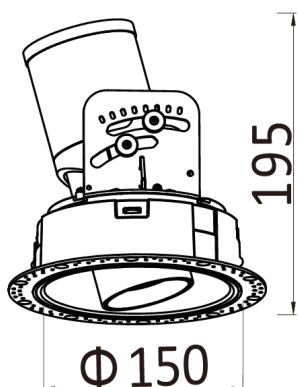

-
-
-
-
-
-
-
-
-
-
-

Model	System Power (W)	Source Lumen (Lm) (CRI>90, 3000K)	System Lumen (Lm) / Beam Angle (CRI>90, 3000K)			
			Narrow (14°/18°/18°/21°)	Medium (23°/25°/25°/27°)	Medium (35°/38°/38°/39°)	Wide (53°/54°/54°/54°)
SR-A618-B	9	1314	1081	1171	1186	1157
SR-A618-J	14	2016	1648	1783	1807	1754
SR-A618-K	23	3228	2605	2799	2835	2750
SR-A618-L	26	3849	3141	3400	3446	3329

CRI	CCT	Material	LED Lifetime	Colour	Voltage	Dimming
>90	3000K/4000K	Aluminium	L80 (12K) > 66,000 hrs L90 (12K) > 41,000 hrs	BK / WH	220-240V	Available on request

For office locations visit www.lpalighting.com



The information presented in this document is for information purposes only and does not constitute any obligation on our part. We reserved the right to make technical and design changes at any time and without notice.



Accessories

(available on request)



Honeycomb Louvre



Elliptical Lens

Photometrics

(standard beam angles, alternative available on request)

