




OCTOPUS SR-C104

For a downlight that can double as a feature spot or wall washer, we present the Octopus series. With up to 3 lamp connections, this luminaire is compact and powerful. Our market-leading rendering makes this downlight ideal for any commercial or retail application. This functional and flexible downlight will meet the varying needs of architectural projects with a 355° rotation and 70° tilt.

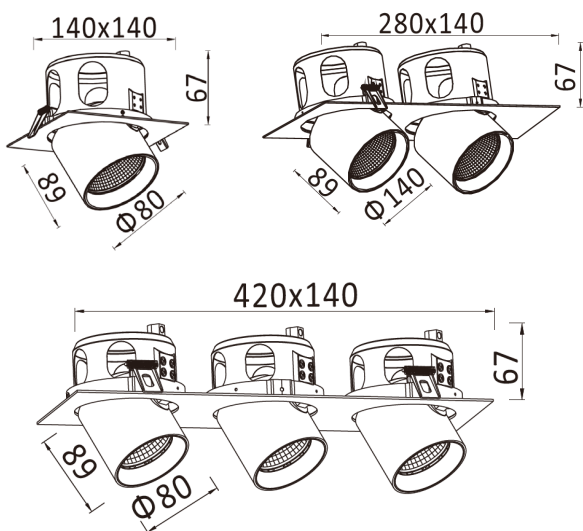

Feature icons:

- CE, UKCA, IP20, CRI >90, 355° rotation, 70° tilt, High Efficacy, 5 Year Warranty, 130x130 mm footprint.

Model	Source Power (W)	System Power (W)	Source Lumen (Lm) (CRI>90, 3000K)	System Lumen (Lm) / Beam Angle (CRI>90, 3000K)			
				Narrow (14°)	Medium (22°)	Medium (36°)	Wide (58°)
SR-C104-J	17	19	2269	2074	2014	2034	1977
SR-C104-K	25	27	3107	2866	2744	2776	2685

CRI	CCT	Material	LED Lifetime	Colour	Voltage	Dimming
>90	3000K/4000K	Aluminium	L80(12K) > 66,000 hrs L90 (12K) > 41,500 hrs	BK / WH	220-240V	Available on request

Model	Source Lumen (Lm) / Beam Angle (CRI>90, 3000K)
SR-C104-2-J	2x2269
SR-C104-2-K	2x3107

Model	Source Lumen (Lm) / Beam Angle (CRI>90, 3000K)
SR-C104-3-J	3x2269
SR-C104-3-K	3x3107




For office locations visit www.lpalighting.com

The information presented in this document is for information purposes only and does not constitute any obligation on our part. We reserved the right to make technical and design changes at any time and without notice.



Accessories


(available on request)



Honeycomb Louvre



Elliptical Lens



Barn Door Louvre



Glass Lens

Photometrics

(standard beam angles, alternative available on request)

