




## DORA ST-C464

The Dora series is a sophisticated LED track light option for accent lighting in retail, hospitality and general display applications. Our market-leading colour rendering, and easy adjustability confirm Dora's excellent suitability for these commercial applications.

All fixtures fit a standard three-circuit track and adjust through 90° vertical plane and 355° horizontal plane. Other options include the choice of CCT colour, a glass lens, an elliptical lens, barn-doors and honeycomb louvres.

Also available in surface mount and suspended format.

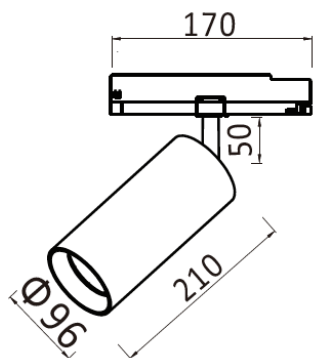

| Model     | Source Power (W) | System Power (W) | Source Lumen (Lm)<br>(CRI>80, 3000K) | System Lumen (Lm) / Beam Angle<br>(CRI>80, 3000K) |                         |                         |                       |
|-----------|------------------|------------------|--------------------------------------|---|-------------------------|-------------------------|-----------------------|
|           |                  |                  |                                      | Narrow<br>(19°/23°/23°)                           | Medium<br>(24°/27°/27°) | Medium<br>(32°/35°/35°) | Wide<br>(58°/58°/57°) |
| ST-C464-J | 17               | 19               | 2269                                 | 2135  | 2155                    | 2109                    | 2013                  |
| ST-C464-K | 25               | 27               | 3107                                 | 2943  | 2973                    | 2912                    | 2788                  |
| ST-C464-L | 32               | 35               | 3985                                 | 3679  | 3659                    | 3619                    | 3467                  |
| ST-C464-M | 36               | 39               | 4454                                 | 3834  | 3694                    | 3743                    | 3736                  |


  

| CRI | CCT         | Material  | LED Lifetime                                    | Colour  | Voltage  | Dimming              |
|-----|-------------|-----------|---|---------|----------|----------------------|
| >90 | 3000K/4000K | Aluminium | L80(12K) > 66,000 hrs<br>L90 (12K) > 41,500 hrs | BK / WH | 220-240V | Available on request |



## Accessories


(available on request)



Honeycomb Louvre



Elliptical Lens



Barn Door



Glass Lens

## Photometrics

(standard beam angles, alternative available on request)

