



OMAR II PANEL (High Efficacy)


LED panels revolutionised lighting in commercial and retail spaces and our market-leading products and options are ready to meet your every application. Our quality reflects our focus on flexibility; a flexibility that ensures the best lighting outcome for every client. Its profile fits seamlessly into any workplace and can be plaster recessed, surface mounted or suspended. The micro-prismatic diffuser delivers low-glare and our LED selection ensures excellent colour rendering to further enhance the comfort and efficiency of the lit space.

Applications: Offices, educational, retail stores, supermarkets, hospitals, health services etc.



PRODUCT FEATURES

- Light output: Up to 3,168Lm
- Efficacy: Up to 158Lm/W
- Ideal for all commercial applications
- Life time: L80 >54,000 hours
- Colour rendering exceeds CRI:80
- Diffuser: Microprismatic
- CCT options: 3000K/4000K
- UGR<19
- Non-waterproof panel: IP50
- Waterproof panel: IP54 (below ceiling) & IP20 (inside ceiling)
- Plaster and surface mount frame accessories available
- Suspension kit available
- Available colour: white
- Dimming options on request
- Flex and plug or direct connection
- Five Year Warranty

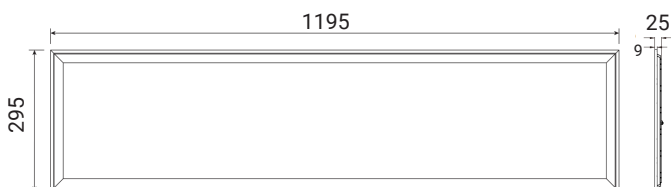

Model	Delivered Lumens	System Power	CCT	Beam Angle
PA-OMAR2HE-20	3168Lm	20W	3000K	90°
PA-OMAR2HE-20	3084Lm	20W	4000K	90°

CRI	Material	Voltage	Colour	Dimming Options
>80	PMMA & Aluminium	220-240V, 50Hz	White	Non-Dim/0-10V/DALI

For office locations visit www.lpalighting.com



Accessories

(available on request)



Plaster Frame



Surface Frame



Suspension Kit




Recessed Kit

Photometrics

(standard beam angles, alternative available on request)

Wide (90°) at 20W 3000K

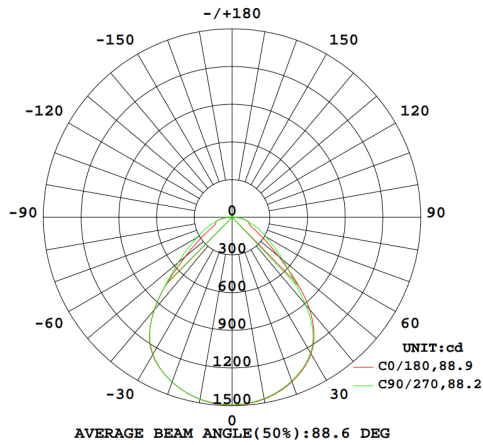

Wide (90°) at 20W 4000K

