




## OCTOPUS SR-C102 (High Efficacy)

For a downlight that can double as a feature spot or wall washer, we present the Octopus series. With up to 3 lamp connections, this luminaire is compact and powerful. Our market-leading rendering makes this downlight ideal for any commercial or retail application. This functional and flexible downlight will meet the varying needs of architectural projects with a 355° rotation and 70° tilt.

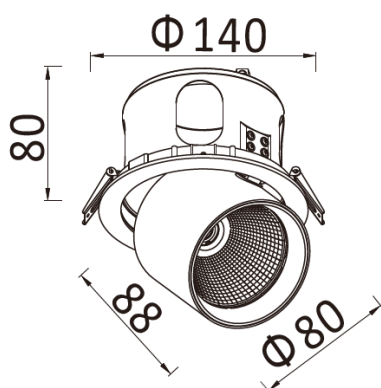

Model	System Power (W)	Source Lumen (Lm) (CRI>90, 3000K)	System Lumen (Lm) / Beam Angle (CRI>90, 3000K)			
			Narrow (15°/14°)	Medium (22°/21°)	Medium (36°/37°)	Wide (58°)
SR-C102-J	14	2016	1746	1713	1716	1651
SR-C102-K	23	3228	2702	2585	2558	2587


CRI	CCT	Material	LED Lifetime	Colour	Voltage	Dimming
>90	3000K/4000K	Aluminium	L80(12K) > 66,000 hrs L90 (12K) > 41,000 hrs	BK / WH	220-240V	Available on request

\* Please note the model code has been updated since the release of the EPD.



## Accessories


(available on request)



Honeycomb Louvre



Elliptical Lens



Barn Door Louvre



Glass Lens

## Photometrics

(standard beam angles, alternative available on request)

