




GALLERY ST-C441

The streamlined and compact design of the Gallery series allows for a built-in driver. This compact luminaire is powerful enough for any commercial or retail application offering a versatile range of output levels and beam angle options, and our market-leading colour rendering. This spotlight series offers a compact design with the highest performance standards.

All our fixtures fit standard three-circuit track and adjust easily through 90° in the vertical plane and 355° in the horizontal plane. Options include the choice of CCT colour, body colour, honeycomb louvres, glass lens, elliptical lens and barn door cut-off control.

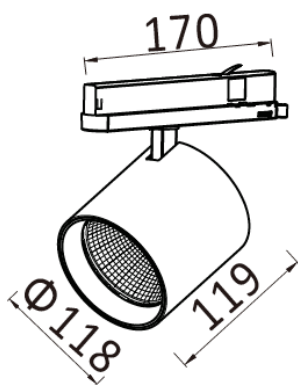

Model	Source Power (W)	System Power (W)	Source Lumen (Lm) (CRI>90, 3000K)	System Lumen (Lm) / Beam Angle (CRI>90, 3000K)			
				Narrow (12°/10°/10°/12°)	Narrow (20°/20°/20°/21°)	Medium (43°)	Wide (58°)
ST-C441-J	17	19	2269	2176	2120	2099	2108
ST-C441-K	25	27	3107	3030	2936	2896	2928
ST-C441-L	32	35	3985	3781	3676	3620	3689
ST-C441-M	36	39	4454	4338	4245	4177	4220


CRI	CCT	Material	LED Lifetime	Colour	Voltage	Dimming
>90	3000K/4000K	Aluminium	L80(12K) > 66,000 hrs L90 (12K) > 41,500 hrs	BK / WH	220-240V	Available on request

* Please note the model code has been updated since the release of the EPD.




Accessories

(available on request)



Honeycomb Louvre



Barn Door



Elliptical Lens



Glass Lens

Photometrics

(standard beam angles, alternative available on request)

