




GALLERY ST-C443 (High Efficacy)

The streamlined and compact design of the Gallery series allows for a built-in driver. This compact luminaire is powerful enough for any commercial or retail application offering a versatile range of output levels and beam angle options, and our market-leading colour rendering. This spotlight series offers a compact design with the highest performance standards.

All our fixtures fit standard three-circuit track and adjust easily through 90° in the vertical plane and 355° in the horizontal plane. Options include the choice of CCT colour, body colour, honeycomb louvres, glass lens, elliptical lens and barn door cut-off control.

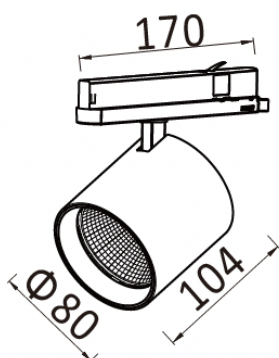

Model	System Power (W)	Source Lumen (Lm) (CRI>90, 3000K)	System Lumen (Lm) / Beam Angle (CRI>90, 3000K)			
			Narrow (14°)	Medium (22°/21°)	Medium (37°)	Wide (59°/58°)
ST-C443-J	14	2016	1734	1674	1609	1605
ST-C443-K	24	3228	2702	2585	2558	2587

CRI	CCT	Material	LED Lifetime	Colour	Voltage	Dimming
>90	3000K/4000K	Aluminium	L80(12K) > 66,000 hrs L90 (12K) > 41,000 hrs	BK / WH	220-240V	Available on request




Accessories

(available on request)



Honeycomb Louvre



Barn Door



Elliptical Lens




Glass Lens


Photometrics

(standard beam angles, alternative available on request)


Narrow (14°) at 24W

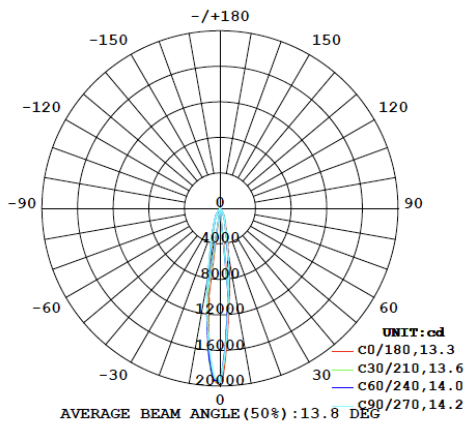

Narrow (21°) at 24W

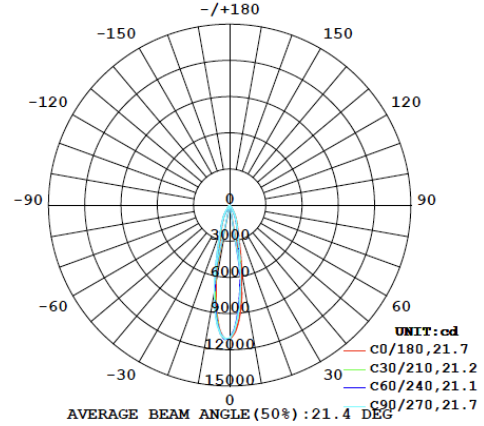

Medium (37°) at 24W

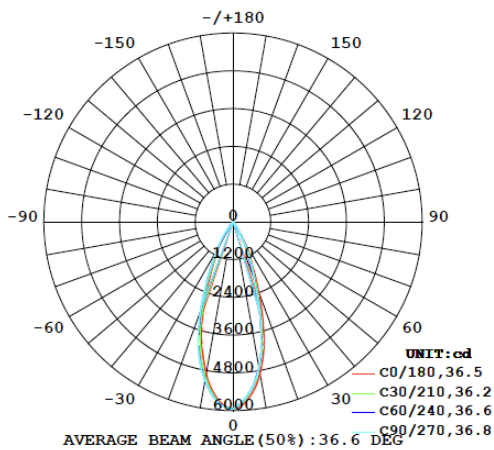

Wide (58°) at 24W

