




GALLERY ST-C449 (High Efficacy)

The streamlined and compact design of the Gallery series allows for a built-in driver. This compact luminaire is powerful enough for any commercial or retail application offering a versatile range of output levels and beam angle options, and our market-leading colour rendering. This spotlight series offers a compact design with the highest performance standards.

All our fixtures fit standard three-circuit track and adjust easily through 90° in the vertical plane and 355° in the horizontal plane. Options include the choice of CCT colour, body colour, honeycomb louvres, glass lens, elliptical lens and barn door cut-off control.

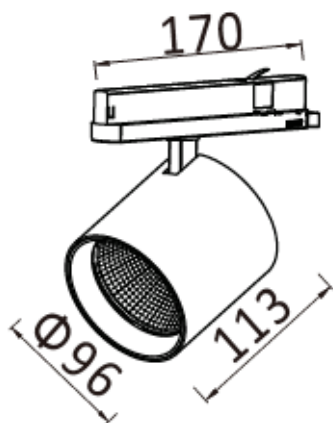

Model	System Power (W)	Source Lumen (Lm) (CRI>90, 3000K)	System Lumen (Lm) / Beam Angle (CRI>90, 3000K)			
			Narrow (15°/15°/16°/16°)	Medium (20°/19°/22°/21°)	Medium (41°/41°/42°/42°)	Wide (60°/56°/59°/59°)
ST-C449-J	14	2016	1747	1702	1715	1699
ST-C449-K	23	3229	3085	3087	3040	2937
ST-C449-L	26	3849	3317	3224	3260	3240
ST-C449-M	35	4810	4153	4067	4080	4058


CRI	CCT	Material	LED Lifetime	Colour	Voltage	Dimming
>90	3000K/4000K	Aluminium	L80(12K) > 66,000 hrs L90 (12K) > 41,000 hrs	BK / WH	220-240V	Available on request

* Please note the model code has been updated since the release of the EPD.




Accessories

(available on request)



Honeycomb Louvre



Barn Door



Elliptical Lens




Glass Lens


Photometrics

(standard beam angles, alternative available on request)


Narrow (16°) at 35W

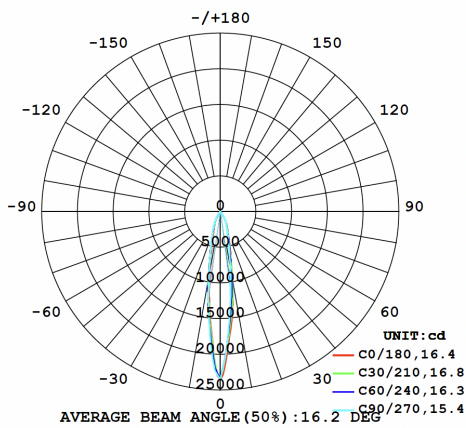

Medium (21°) at 35W

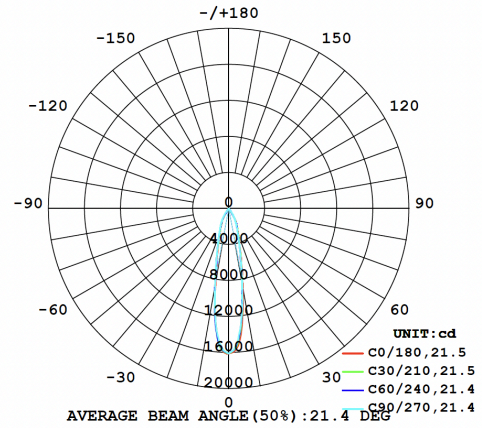

Medium (42°) at 35W

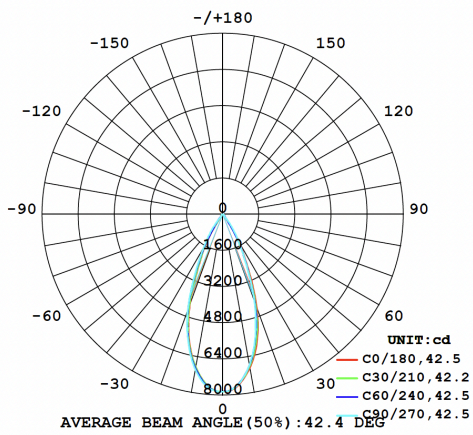

Wide (59°) at 35W

