




ISSE-IV ST-C625 (High Efficacy)

The upgraded Isse-IV series is a sleek and sophisticated luminaire designed for a 48V low-voltage magnetic track system. Its click-fit construction allows easy installation and maintenance with no tools required. With adaptability and versatility in mind, the Isse-IV series is perfect for architectural and contemporary illumination. Available in recessed, surface mounted and pendant formats, the Isse-IV series delivers flexibility and a seamless look to meet the demands of any design application. All luminaires in this series are compatible with Casambi modules to achieve wireless intelligent controls.

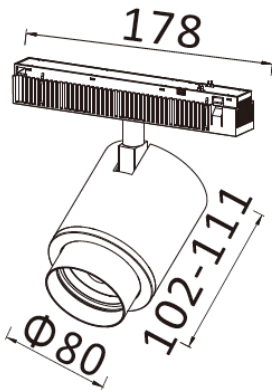


Model	System Power (W)	Source Lumen (Lm) (CRI>90, 3000K)	System Lumen (Lm) / Beam Angle (CRI>90, 3000K)	
			Narrow~Wide (19°~51°)	
ST-C625-A	6	785	559~631	
ST-C625-B	10	1314	950~1082	

CRI	CCT	Material	LED Lifetime	Colour	Voltage	Dimming
>90	3000K/4000K	Aluminium	L80(12K) > 66,000 hrs L90 (12K) > 41,000 hrs	48V DC	220-240V	Available on request



Accessories

(available on request)



Honeycomb Louvre

Photometrics

(standard beam angles, alternative available on request)

